

UniFi

UISP

Branding

Q

Dream Machine Pro Max

s

Switching

WiFi

Physical Security

Door Access

Integrations

Advanced Hosting


Large Scale > Dream Machine Pro Max



Dream Machine Pro Max

UDM-Pro-Max

- Datasheet
- In The Box
- Marketing Images
- Accessories
- Installation Guide

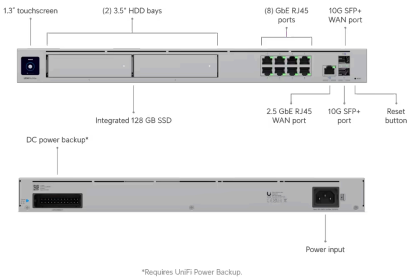

^ Overview

Dimensions

442.4 x 43.7 x 285.6 mm
(17.4 x 1.7 x 11.2")

UniFi Application Suite

- Network ⓘ ✓
- Protect ⓘ ✓
- Access ⓘ ✓
- Talk ⓘ ✓
- Connect ⓘ ✓

Managed UniFi Devices

200+

Managed Cameras	(50) HD
	(25) 2K
	(15) 4K
Managed Access Hubs i	150
Simultaneous Users Connected	2,000+
Max. WAN Port Count	8
Default WAN Ports	(1) 10G SFP+
	(1) 2.5 GbE RJ45
Port Layout	
1 GbE RJ45	8
	(1G/100M/10M)
2.5 GbE RJ45	1
	(2.5G/1G/100M/10M)
10G SFP+	2
	(10G/1G)
IDS/IPS Throughput	5 Gbps
Form Factor	Rack mount (1U)
Redundancy	Shadow Mode (VRRP) Gateway Failover
	DC Power Backup i
^ Security	
Stateful Firewall	✓
Application-Aware Layer 7 Firewall	✓
DPI & Traffic Identification	✓
Zone-Based Firewall Advanced Filtering (Regions, Domains, Apps)	✓
Content Filtering	✓
Intrusion Prevention (IPS/IDS)	✓
Ad Blocking	✓
IDS/IPS Signatures	55,000+ with CyberSecure

VLAN/Subnet-based Traffic Segmentation	✓
--	---

^ VPN & SD-WAN

License-Free SD-WAN	✓
---------------------	---

Site-to-Site VPN

Site Magic	✓
------------	---

IPsec	✓
-------	---

OpenVPN	✓
---------	---

VPN Server

Identity Endpoint One-Click VPN	✓
---------------------------------	---

Teleport Zero-Configuration VPN	✓
---------------------------------	---

WireGuard	✓
-----------	---

OpenVPN	✓
---------	---

L2TP	✓
------	---

VPN Client

OpenVPN	✓
---------	---

WireGuard	✓
-----------	---

^ Networking

Multi-WAN Load Balancing	✓
--------------------------	---

Shadow Mode (VRRP) High Availability	✓
--------------------------------------	---

LACP Port Aggregation	✓ ⓘ
-----------------------	-----

Dynamic Routing

OSPF	✓
------	---

BGP	✓
-----	---

Advanced QoS	✓
--------------	---

Multicast DNS (mDNS)	✓
----------------------	---

Advanced NAT (SNAT / DNAT / Masquerade / NAT Pooling / 1-to-1 NAT)	✓
Integrated RADIUS Server	✓
RADIUS over TLS (RadSec)	✓
Additional Internet Failover with UniFi LTE Backup	✓
Internet Quality and Outage Reporting	✓
MAC Address Table Size	4,000
Policy-based WAN and VPN Routing	✓
Customizable DHCP Server	✓
IPv6 ISP Support	✓
IGMP Proxy	✓
Virtual Network Override	✓
All Traffic Flows	✓

^ **Hardware**

NVR Storage	(2) 3.5" NVR HDD bays Built-in 128 GB SSD for Faster Experience
Max. Power Consumption	60W
Power Method	(1) Universal AC input, 100-240V AC, 2A Max., 50/60 Hz (1) USP-RPS DC input, 11.5V DC, 8.7A
Power Supply	AC/DC, internal, 100W
Supported Voltage Range	100-240V AC
Heat Dissipation	205 BTU/hr
Processor	Quad-core ARM® Cortex®-A57 at 2.0 GHz
System Memory	8 GB
On-board Storage	32 GB eMMC 128 GB SSD (Integrated)
Weight	4.7 kg (10.4 lb)
Enclosure Material	Aluminium CNC, SGCC steel

Mount Material	SGCC steel
LCM Display	1.3" touchscreen
Management	Ethernet Bluetooth
LEDs	
Ethernet	✓
SFP+	✓
RPS	✓
PSU	✓
HDD	✓
Button	(1) Factory reset
ESD/EMP Protection	Air: ± 15kV, contact: ± 8kV
Ambient Operating Temperature	-10 to 40° C (14 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 06369-24-08356, SRRC

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.