



UniFi UISP Branding

Q

Gateway UXG Pro



s Switching WiFi Physical Security Door Access Integrations Advanced Hosting

All > Gateway Pro



Gateway Pro UXG-Pro

- Datasheet
- In The Box
- Marketing Images
- Accessories
- Installation Guide

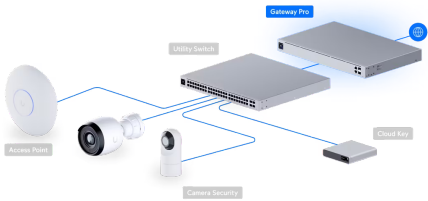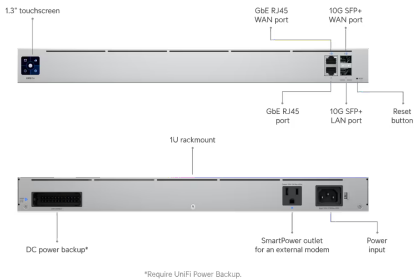

^ Overview

Dimensions	442.4 x 43.7 x 285.6 mm (17.4 x 1.7 x 11.2")
Max. WAN Port Count	3
Default WAN Ports	(1) 10G SFP+ (1) GbE RJ45
Port Layout	
10G SFP+	2 (10G/1G)
IDS/IPS Throughput	3.5 Gbps

Form Factor

Rack mount (1U)

Redundancy

DC Power Backup ⓘ

^ Security

Stateful Firewall

✓

Application-Aware Layer 7 Firewall

✓

DPI & Traffic Identification

✓

Zone-Based Firewall Advanced Filtering
(Regions, Domains, Apps)

✓

Content Filtering

✓

Intrusion Prevention (IPS/IDS)

✓

Ad Blocking

✓

IDS/IPS Signatures

55,000+
With CyberSecure

^ VPN & SD-WAN

License-Free SD-WAN

✓

Site-to-Site VPN

Site Magic

✓

IPsec

✓

OpenVPN

✓

VPN Server

Teleport Zero-Configuration VPN

✓ ⓘ

WireGuard

✓

OpenVPN

✓

L2TP

✓

VPN Client

OpenVPN

✓

WireGuard

✓

^ Networking

Multi-WAN Load Balancing ✓

Dynamic Routing

OSPF ✓

Advanced QoS ✓

Multicast DNS (mDNS) ✓

Advanced NAT (SNAT / DNAT /
Masquerade / NAT Pooling / 1-to-1 NAT) ✓

Integrated RADIUS Server ✓

RADIUS over TLS (RadSec) ✓

Additional Internet Failover with UniFi
LTE Backup ✓

Internet Quality and Outage Reporting ✓

All Traffic Flows ✓ ⓘ

^ Hardware

Max. Power Consumption 30W

US:

(1) Universal AC input, 125V AC, 2.7A Max., 60 Hz

(1) RPS DC input, 11.5V DC, 2.87A

Power Method

Worldwide:

(1) Universal AC input, 200-240V AC, 1.7A Max., 50/60 Hz

(1) RPS DC input, 11.5V DC, 2.87A

Power Supply AC/DC, internal, 50W

Supported Voltage Range 100-240V AC

Heat Dissipation 102 BTU/hr

Processor Quad-core ARM® Cortex®-A53 at 1.5 GHz

System Memory 2 GB

Weight 3.4 kg (7.5 lb)

Enclosure Material Front panel: Aluminum CNC
Top cover/base: SGCC steel

LCM Display	1.3" touchscreen
Management	Ethernet
LEDs	
Ethernet	✓
SFP+	✓
RPS	✓
AC Outlet	✓
Button	(1) Factory reset
ESD/EMP Protection	Air: ± 15kV, contact: ± 8kV
Ambient Operating Temperature	-10 to 40° C (14 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 19089-22-08356

^ **Software**

Application Requirements

UniFi Network	Version 8.3.32 and later
---------------	--------------------------

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)