

UniFi UISP Branding

Q

Search UniFi products

; Switching WiFi Camera Security Door Access Integrations Advanced Hosting

Professional > Pro 24 PoE





Pro 24 PoE
USW-Pro-24-POE

Datasheet

In The Box

Marketing Images

Installation Guide

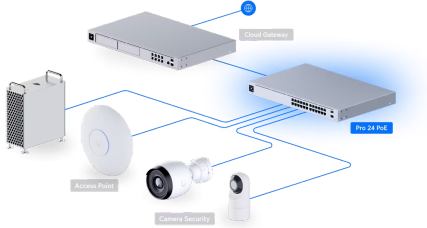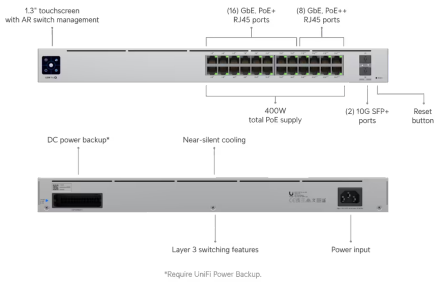

Overview

Dimensions	442 x 285 x 44 mm (17.4 x 11.2 x 1.7")
Port Layout	
1 GbE RJ45	24 (16 PoE+; 8 PoE++) (1G/100M/10M)
10G SFP+	2 (10G/1G)
Max. PoE Output	Up to PoE++
Total PoE Availability	400W

Redundancy	DC Power Backup
Layer 3	✓
Form Factor	Rack mount (1U)

^ Performance

Switching Capacity	88 Gbps
Total Non-Blocking Throughput	44 Gbps
Forwarding Rate	65 Mpps
Supported VLANs	1,000
MAC Address Table Size	16,000
L3 Table Size	
ARP Entries	768
IPv4 Routes	64
Packet Buffer Size	2 MB
Access Lists	
IPv4	128
MAC	128

^ Layer 3 Features

DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓

^ Layer 2 Features

LACP Port Aggregation	✓
STP & RSTP	✓
QoS (DSCP)	✓
Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓

Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓

^ **Hardware**

PoE Ports

PoE+	16
------	----

PoE++	8
-------	---

Max. PoE Wattage per Port by PSE

PoE	15.4W
-----	-------

PoE+	30W
------	-----

PoE++	64W
-------	-----

Max. Power Consumption	50W (Excluding PoE Output) 450W (Including PoE Output)
Power Method	(1) Universal input, 100—240V AC, 50/60 Hz (1) USP RPS DC input
Power Input Method	AC input
Power Supply	AC/DC, internal, 450W
Supported Voltage Range	100—240V AC
Management	Ethernet AR
Heat Dissipation	170.6 BTU/hr (Excluding PoE Output)
Weight	Without mounting brackets: 4.3 kg (9.5 lb) With mounting brackets: 4.4 kg (9.7 lb)
Enclosure Material	SGCC steel
Supported Rack Depth	400~1200 mm (15.7-47.2")
LCM Display	1.3" touchscreen
ESD Protection	Air: ± 16kV, contact: ± 12kV
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 13790-20-08356

^ **Software**

Application Requirements

UniFi Network	Version 5.10.5 and later
---------------	--------------------------

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.