



UniFi   UISP   Branding

Q

UCK-G2-PLUS SSD

s   Switching   WiFi   Physical Security   Door Access   Integrations   Advanced Hosting

All > CloudKey+





CloudKey+  
UCK-G2-SSD

Datasheet

Marketing Images

Accessories

Installation Guide

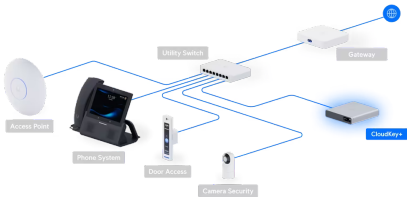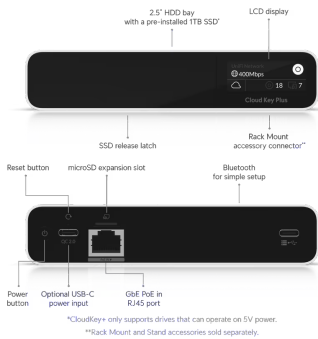

Overview

Dimensions

131.2 x 27.1 x 134.2 mm  
(5.2 x 1.1 x 5.3")

Managed Cameras

(24) HD  
(14) 2K  
(8) 4K ⓘ

Managed Access Hubs ⓘ

80

Networking Interface

(1) GbE RJ45

Form Factor

Compact Desktop

Door Access Support

✓

UniFi Application Suite

|           |   |
|-----------|---|
| Network ⓘ | ✓ |
| Protect ⓘ | ✓ |
| Access ⓘ  | ✓ |
| Talk ⓘ    | ✓ |
| Connect ⓘ | ✓ |

^ **Hardware**

|                               |                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------|
| Hard Drive Capacity           | 1 TB 2.5" SATA SSD<br>(User-upgradeable) ⓘ                                       |
| Max. Power Consumption        | 9.6W                                                                             |
| Power Method                  | PoE<br>USB-C power with Quick charge 2.0/3.0 power adapter, 9V DC, 2A (Optional) |
| Processor                     | Octa-core Arm® Cortex®-A53 based chip                                            |
| Memory                        | 32 GB eMMC<br>3 GB RAM                                                           |
| Management                    | Ethernet<br>Bluetooth                                                            |
| Display                       | 1.42" gray-scale OLED                                                            |
| Weight                        | 560 g (1.2 lb)                                                                   |
| Enclosure Material            | Anodized Aluminum                                                                |
| Ambient Operating Temperature | 0 to 35° C (32 to 95° F)                                                         |
| Ambient Operating Humidity    | 20 to 80% noncondensing                                                          |
| NDAA Compliant                | ✓                                                                                |
| Certifications                | CE, FCC, IC, Anatel: 05196-25-08356, SRRC                                        |

### Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.