



UniFi UISP Branding

Q

USW 24 poe

s Switching WiFi Physical Security Door Access Integrations Advanced Hosting



Standard > [Standard 24 PoE](#)



Standard 24 PoE

USW-24-POE

- Datasheet
- In The Box
- Marketing Images
- Accessories
- Installation Guide

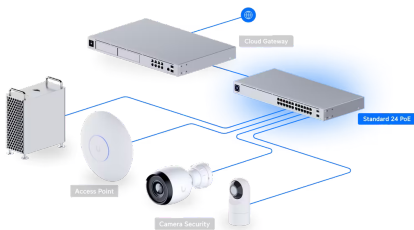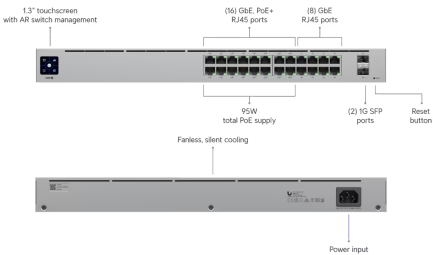

Overview

Dimensions	442 x 200 x 44 mm (17.4 x 7.9 x 1.7")
Port Layout	
1 GbE RJ45	24 (16 PoE+) (1G/100M/10M)
1G SFP	2 (1G)
Max. PoE Output	Up to PoE+
Total PoE Availability	95W
Form Factor	Rack mount (1U)

^ Performance

Switching Capacity	52 Gbps
Total Non-Blocking Throughput	26 Gbps
Forwarding Rate	39 Mpps
Supported VLANs	1,000
MAC Address Table Size	8,000
Packet Buffer Size	0.5 MB
Access Lists	
IPv4	128
MAC	128

^ Layer 2 Features

LACP Port Aggregation	✓
STP & RSTP	✓
Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓

Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓

^ Hardware

PoE Ports

PoE+	16
------	----

Max. PoE Wattage per Port by PSE

PoE	15.4W
-----	-------

PoE+	32W
------	-----

Max. Power Consumption	25W (Excluding PoE output) 120W (Including PoE Output)
------------------------	---

Power Method	Universal input, 100-240V AC, 50/60 Hz
--------------	--

Power Input Method	AC input
--------------------	----------

Power Supply	AC/DC, internal, 120W
--------------	-----------------------

Supported Voltage Range	100-240V AC
-------------------------	-------------

Management	Ethernet AR
------------	----------------

Heat Dissipation	85.3 BTU/hr (Excluding PoE Output)
------------------	------------------------------------

Weight	Without mounting brackets: 3 kg (6.6 lb) With mounting brackets: 3.1 kg (6.8 lb)
--------	---

Enclosure Material	SGCC steel
--------------------	------------

Mount Material	SGCC steel
----------------	------------

Supported Rack Depth	400~1200 mm (15.7-47.2")
----------------------	-----------------------------

LCM Display	1.3" touchscreen
-------------	------------------

ESD Protection	Air: $\pm 16\text{kV}$, contact: $\pm 12\text{kV}$
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 00593-21-08356

^ **Software**

Application Requirements

UniFi Network	Version 7.2.94 and later
---------------	--------------------------

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.